

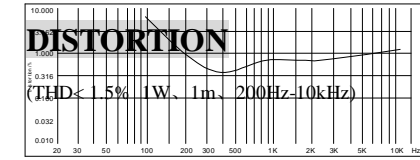


## Dual-Crossover System DSP644

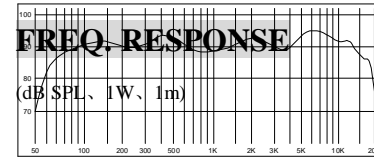

### INSTALLATION

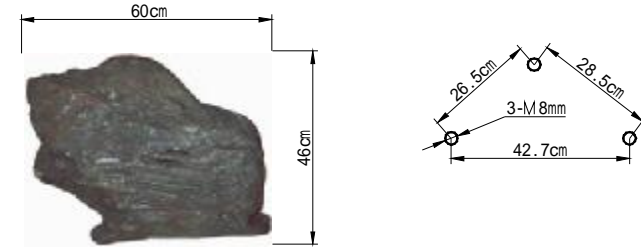

1. Setup a foundation like a platform with concrete and set 3 screws (8mm) stretching out 5cm from the corners as shown above after concrete rigidify continue;
2. Connect public address wire to the speaker terminals according to the table below;

Red---Blue	15W	30W
Red---White	30W	No Use

**ATTENTION: The red line must be the common terminal when connecting public address wires.**

3. Fix the speaker system with 3 nuts on screws of the foundation and installation

Frequency Range	60Hz-14KHz	Rated Power	30W
Sensitivity	88 ± 2dB	Dimension(L×W×H)	250×600×460mm
<b>SPECIFICATIONS</b>	±2dB	Weight	8.5kg

## OWNER'S MANUAL

Thank you for purchasing PA speaker system of **DSPPA** series. All of **DSPPA** series products have been tested strictly before shipping. **DSPPA** series PA speaker system is widely used in hotel, trade building, supermarket, school, entertainment, etc. It's the most ideal choice of you! In order to facilitate installing, modulating and running please read this manual carefully before setup.

### FEATURES:

- 1 The products have gotten waterproof certificate and other certificates and are suitable for grassplot use.
- 1 Different input voltage (70V/100V) can be chosen for different public address wires.
- 1 The speaker units have the features of high sensitivity and high dynamic range. The speaker is the construction of dual-crossover.