





公共广播系列

天花扬声器 DSP804

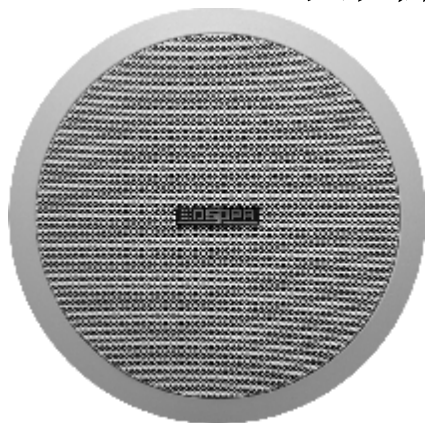


频响特性

(dB SPL、1W、1m)




卸网示意图




失真特性

(THD<1.5% 1W、1m、100Hz-10kHz)



安装孔





安装方法

- 1、按上图所示意的方法将喇叭网顶出；
- 2、在天花板上割一个直径为 242-245mm 的安装圆孔（见上图）；
注：天花板承重必须大于 3.2Kg
- 3、连接音频广播传输线。根据实际功率需要按下表选择合适端子连线；

| 端子 | 70V | 100V |
|-------|-----|------|
| 红---蓝 | 15W | 30W |
| 红---白 | 30W | — |

- 4、将扬声器推入安装孔中，用螺丝将其固定在天花板上，扣上喇叭网；（如下图）



- 5、最后，检查安装是否牢固可靠。

使用说明

承蒙选用**迪士普**广播扬声器系列产品。所有**迪士普**产品出厂前均经严格测试，信守质量承诺。**迪士普**广播扬声器广泛应用于酒店、商厦、超市、学校、休闲娱乐等场所，是您理想的选择。为了方便您安装、调试和使用本产品，安装前请详细阅读本说明。

性能特点：

- l 工作电压 70/100V，额定功率 30W；
- l 最大声压级 107±2dB，有效频率范围 50Hz - 20kHz；
- l 重 3.2Kg，优质工程塑料注塑成型，经久耐用，不变形、不褪色；
- l 扬声器悬边阻尼处理，寿命长，灵敏度高（92±2dB），声音清晰、明亮。




Public Address System

Ceiling Speaker System DSP804




FREQ. RESPONSE

(dB SPL、1W、1m)



TAKE AWAY NET




DISTORTION

(THD<1.5% 1W、1m、100Hz-10kHz)



INSTALL HOLE



INSTALLATION


- 1、 Press to ascend the method of the diagram trumpet net the crest outs;
- 2、 Cut a Ø 242mm - Ø 245mm installation hole on ceiling as shown above;

Remark: The bearing of ceiling must exceed 3.2kg

- 3、 Connect audio broadcasting wire to the terminals according to the table below;

| Terminals | 70V | 100V |
|--------------|-----|------|
| Red--- Blue | 15W | 30W |
| Red--- White | 30W | --- |

- 4、 Push the loudspeaker into your ceiling, beat with screw tight, install the net.(following diagram)



- 5、 Adjust the direction of the set and examine whether it is steady.

OWNER'S MANUAL

Thank you for purchasing PA speaker system of DSPPA series. All of DSPPA series products have been tested strictly before shipping. DSPPA series PA speaker system is widely used in hotel, trade building, supermarket, school, entertainment, etc. It's the most ideal choice of you! In order to facilitate installing, modulating and running please read this manual carefully before setup.

FEATURES:

- l 70/100V, Rated power 30W;
- l Max. Sound Pressure Level 107 ± 2dB, Effective Freq. Range 50Hz -20kHz;
- l Weight 3.2 kg, Made of high quality engineering plastic, long-term durability, never out of shape and fade;
- l Driver surround excellent damping, provided with high sensitivity (92±2dB), long life, sound clear and sonorousness.