



Public Address System

## Fireproof Ceiling Speaker System DSP904



### OWNER'S MANUAL


Thank you for purchasing PA speaker system of DSPPA series. All of DSPPA series products have been tested strictly before shipping. DSPPA series PA speaker system is widely used in hotel, trade building, supermarket, school, entertainment, etc. It's the most ideal choice of you! In order to facilitate installing, modulating and running please read this manual carefully before setup.

#### FEATURES:

- | Made of high-class steel and form by stamping;
- | Equipped with wire leading case which hard to burn for fireproof;
- | 70/100V, 1.5 ~ 10W with multiple terminals, suited for different field;
- | Max. Sound Pressure Level  $100 \pm 2\text{dB}$ , Effective Freq. Range 200Hz ~ 14kHz;
- | Weight 1.6 kg. Equipped with clamps for mounting convenient;
- | Driver surround excellent damping, provided with high sensitivity ( $92 \pm 2\text{dB}$ ), long life, sound clear and sonorousness.


#### FREQ. RESPONSE

(dB SPL. 1W.1m)

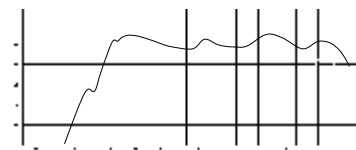


#### DISTORTION

(THD < 1.5% 1W, 1m, 200Hz~10kHz)

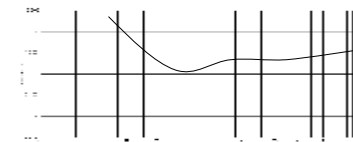


#### DIMENSIONS



Install the Speaker System only need 15cm depth on your ceiling

#### INSTALLATION HOLE




#### INSTALLATION

1. Cut a  $\text{Ø}192\text{mm}$  ~  $\text{Ø}196\text{mm}$  installation hole on ceiling as shown above.
2. Adjust the clamps of the speaker system for different ply of ceiling:  
Set the tip in upper, middle or lower hole for the ply of over 20mm, 10 to 25mm or under 15mm respectively.
3. Connect audio broadcasting wire to the terminals according to the table below

	70V	100V
Red--- White	1.5W	3 W
Red--- Blue	3 W	6 W
Red---Black	5 W	10 W

4. Turn up the clamps of the speaker and insert them into the installation hole on ceiling and then release them as shown below. Put on your gloves for safe is recommended.



5. Finally, examine whether it is steady.

DSPPA ACOUSTIC TECHNOLOGY CO., LTD.