



Public Address System

Fireproof Ceiling Speaker System DSP922



DSP922G

DSP922S

OWNER'S MANUAL


Thanks for purchasing PA speaker system of DSPPA series. All of DSPPA series products have been tested strictly before shipping. DSPPA series PA speaker system is widely used in hotel, trade building, supermarket, school, entertainment, etc. It's the most ideal choice of you! In order to facilitate installing, modulating and running please read this manual carefully before setup.

FEATURES:

- l Made of high-class steel and form by stamping;
- l Equipped with wire leading case which hard to burn for fireproof;
- l 70/100V, 4 ~ 15W with multiple terminals, suited for different field;
- l Max. Sound Pressure Level $101 \pm 2\text{dB}$, Effective Freq. Range 130Hz ~ 20kHz;
- l Weight 2.0 kg. Equipped with clamps for mounting convenient;
- l waterproof driver, high sensitivity ($88 \pm 2\text{dB}$), long life, sound clear and sonorousness.


FREQ. RESPONSE

(dB SPL. 1W. 1m)

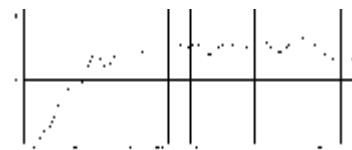


DISTORTION


(THD < 1.5% 1W, 1m, 130Hz~20kHz)



DIMENSIONS



INSTALLATION HOLE




Install the Speaker System only need 15cm depth on your ceiling

INSTALLATION

1. Cut a $\varnothing 192\text{mm} \sim \varnothing 200\text{mm}$ installation hole on ceiling as shown above;
2. Adjust the clamps of the speaker system for different ply of ceiling. Set the tip in upper, middle or lower hole for the ply of over 20mm, 10 to 25mm or under 15mm respectively;
3. Connect audio broadcasting wire to the terminals according to the table below

	70V	100V
Red--- Blue	4 W	8 W
Red--- White	8W	15W

4. Turn up the clamps of the speaker and insert them into the installation hole on ceiling and then release them as shown below;
Put on your gloves for safe is recommended .



5. Finally, examine whether it is steady.

DSPPA ACOUSTIC TECHNOLOGY CO., LTD.