


CAMERA

TD-9442A3B-PA

4MP AI Bullet Network Camera



- H.265+/H265/H.264+/H264/ MJPEG coding
- Max. resolution: 2592 × 1520
- ICR auto switch, true day / night
- 30 ~ 50m IR night view distance
- 3D DNR, true WDR, HLC, BLC, Defog and ROI coding
- 1CH audio input; 1CH built-in speaker
- Built-in micro SD card slot, up to 256GB
- DC12V/PoE power supply
- IP66 ingress protection
- Support three streams
- Intelligent analytics: video exception detection, line crossing detection, region intrusion/entrance/exiting detection, heat map, face detection, target counting by line/area, video metadata
- Blue and red light warning (flashing alternately)
- Support user-defined warning voice import
- Support remote monitoring by smart phones & tablet PCs with iOS and Android OS

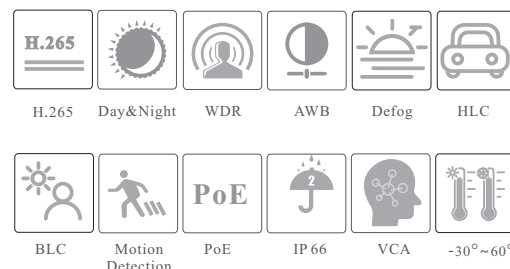

en.tvt.net.cn


For more information, please visit our website

SPECIFICATIONS

Model	TD-9442A3B-PA			
Specifications				
Camera				
Image Sensor	1 / 3" CMOS			
Image Size	2592 × 1520			
Electronic Shutter	Auto/manual mode; manual mode: 1 / 2 s ~ 1 / 100000 s			
Iris Type	DC Iris		Fixed Iris	
Min. Illumination	0.005lux@F1.6,AGC ON; 0 lux with IR			
Lens	2.8~12mm@F1.4 H.FoV: 98°~29°; V.FoV: 54°~16°; D.FoV: 118°~32°		2.8 mm@F1.6, H.FoV: 95°; V.FoV: 50°; D.FoV: 115°; 3.6 mm@F1.6, H.FoV: 80°; V.FoV: 46°; D.FoV: 96°	
Focus	Motorized		Fixed	
Lens Mount	Φ14		M12	
Wide Dynamic Range	120dB			
BLC	Yes			
HLC	Yes			
Defog	Yes			
Digital NR	3D DNR			
S/N Ratio	≥50dB			
Angle Adjustment	Pan: 0°~360°; Tilt:0°~90°; Rotation: 0°~360°			
Image				
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub/third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG			
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile			
Resolution	4MP(2592 × 1520), 2K (2560 × 1440), 3MP (2304 × 1296), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240			
Main Stream	4MP/2K/3MP/1080P / 720P(60Hz : 1 ~ 30fps; 50Hz: 1~25fps) HFR mode: 1080P / 720P(60Hz : 1 ~ 60fps; 50Hz: 1~50fps)			
Sub Stream	720P/D1/CIF(60Hz : 1 ~ 30fps; 50Hz: 1~25fps)			
Third Stream	D1/CIF/480×240 (60Hz : 1 ~ 30fps; 50Hz: 1~25fps)			
Bit Rate	64 Kbps ~ 8 Mbps			
Bit Rate Type	VBR / CBR			
Audio Compression	G711A / U			
Image Settings	ROI, Saturation, Brightness, Hue, Contrast,Wide Dynamic, Sharpness, image flip, image mirror, NR, etc. adjustable through client software or web browser			
ROI	Each ROI to be configured separately			
Interfaces				
Network	RJ 45 10M/100M self-adaptive Ethernet port			
Video Output	No			
Audio	1CH audio input; 1CH built-in speaker			
Alarm	1CH alarm input; 1CH alarm output			
Storage	Built-in micro SD card slot; up to 256GB			
Reset	Yes			
Intelligent Analytics				
Exception Detection	Scene change, video blur and abnormal color detection			
Perimeter Detection	Line crossing detection (human/vehicle classification); Region intrusion/entrance/exiting detection (human/vehicle classification)			
Statistics	Target counting by line/area, heat map			
Face Detection	Face detection and face capture			
Other Events	Abandoned/missing object detection			
Video Metadata	Simultaneously captures human body, motor vehicle and non-motor vehicle and extracts 13 human features, 5 motor vehicle features and 1 non-motor vehicle feature			
DORI Distance				
Lens	Detect	Observe	Recognize	Identify
2.8mm	65.19m(213.87ft)	26.08m(85.56ft)	13.04m(42.78ft)	6.52m(21.39ft)
3.6mm	71.62m(234.97ft)	28.65m(93.99ft)	14.32m(46.98ft)	7.16m(23.49ft)
2.8~12mm(W)	59.66m(195.73ft)	23.87m(78.31ft)	11.93m(39.14ft)	5.97m(19.58ft)
2.8~12mm(T)	216.31m(709.67ft)	86.52m(283.85ft)	43.26m(141.92ft)	21.63m(70.96ft)
Functions				
Remote Monitoring	Web Browser/TVT NVMS2.0/NVR/mobile APP			

Web Browser	IE11(plug-in required)/Chrome 89.0+/Edge 89.0+/Firefox 87.0+/Safari 14.0+
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTMP, RTCP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, 802.1x, UPnP, HTTPS, HTTP POST, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection, sensor alarm, SD card error, SD card full, IP address conflict, cable disconnection, light alarm, audio alarm
General Function	Watermark, video mask, heartbeat, image distortion correction, corridor pattern
Security	Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/HTTPS
PoE	Yes, IEEE802.3af
IR Distance	30 ~ 50 m
Ingress Protection	IP66
Others	
Power Supply	DC12V/PoE
Power Consumption	< 12.5W
Storage Conditions	- 30 °C ~ 65 °C (-22 °F ~ 149 °F), Humidity: less than 95 % (non-condensing)
Operating Conditions	- 30 °C ~ 60 °C (-22 °F ~ 140 °F), Humidity: less than 95 % (non-condensing)
Dimensions (mm)	217.8 × 80.5 × 80.3
Weight (net)	Approx. 0.694KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006)

DIMENSIONS

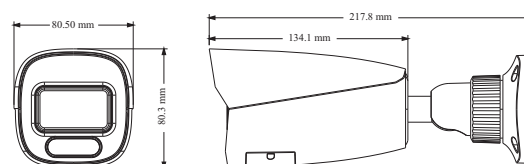

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-9442A3B-PA(D/AZ/PE/AR3)	Motorized lens
	TD-9442A3B-PA(D/PE/AR3)	Fixed lens