

HN-CL20-E

20 watt Full Range ABS ceiling speaker

A ceiling mountable 20 watt full range speaker with a 5.5" cone and ABS housing, the HN-CL20-E has a wide frequency response of 80Hz to 20KHz, making it an ideal option for applications requiring high quality audio reproduction of either speech or music.



HN-CL20-E

FEATURES AND BENEFITS



- Flush-mounting system for fast and easy installation



- Wide frequency response for excellent speech and music reproduction



- Excellent crash and rust resistant design



- Fully ABS plastic with metal grille



- Power tapping options available : 20/10/5W




- CE Compliant


SPECIFICATIONS

TECHNICAL SPECIFICATIONS	
Max. Power	30 W
Rated Power	20 W
Power Tapping	20/10/5 W
Sound pressure Level	93 dB At 1W (1M, 1 KHz)
Effective Frequency Response	50Hz~20KHz
Range	-10 dB
Rated Input Voltage	100 V
Impedance	4 Ω
Connection	Four Screw terminals
Dimensions	Ø 240 mm x Ø 100 mm
Hole Cut Out Size	Ø 210 mm
Weight	-
Color	RPT-White
Speaker Size	144.8 mm (5.7 inches)

FREQUENCY RESPONSE

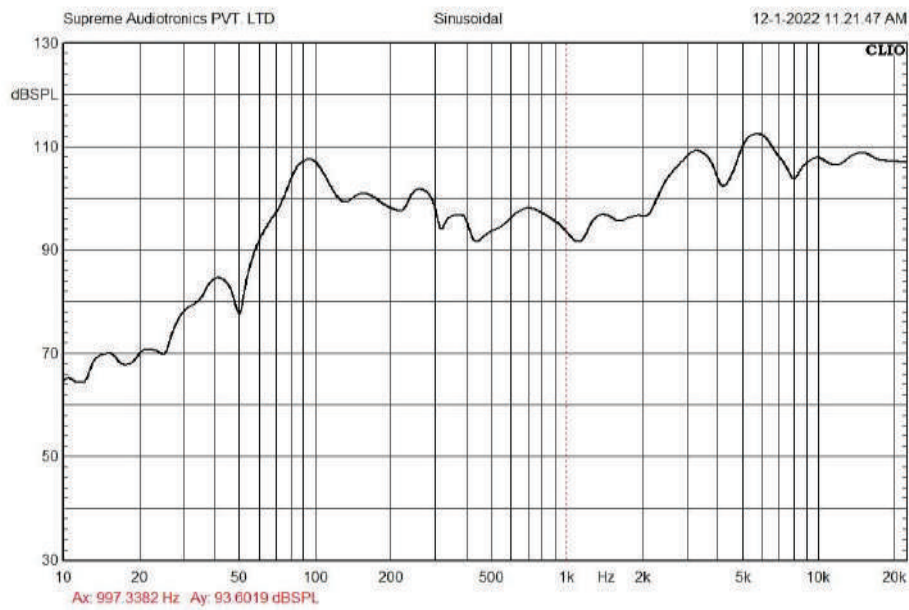

DIMENSIONS

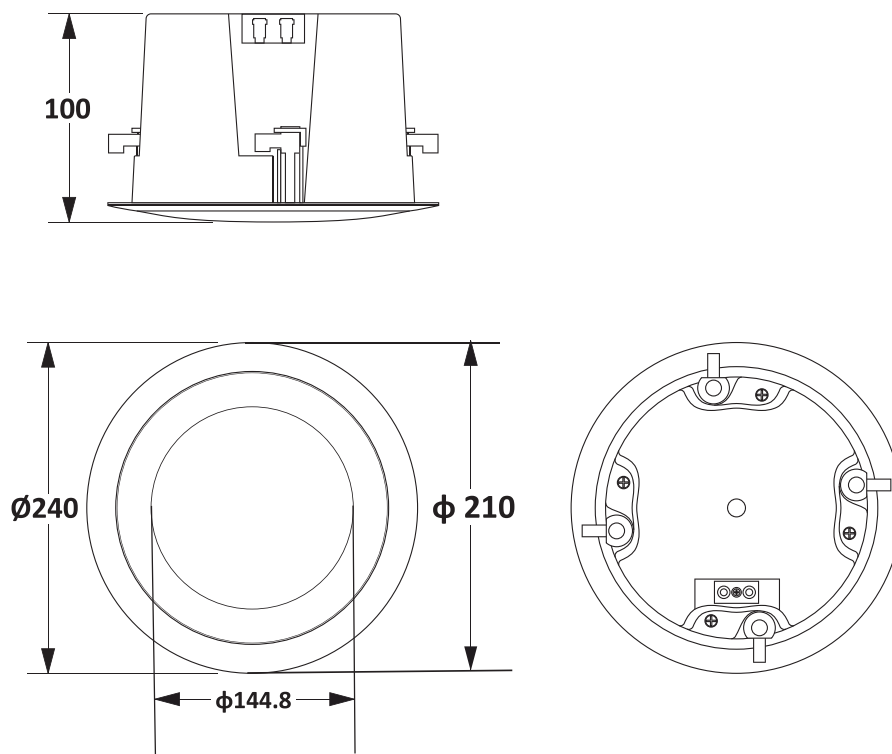

For more information,

www.honeywellbuildings.in

Call: 000-8000-502167

Email: HBT-IndiaBuildings@Honeywell.com

Honeywell HBT India Buildings

Unitech Trade Center, 5th Floor, Sector-43,

Block C, Sushant Lok Phase - I,

Gurgaon - 122 002.

HN-CL20-E | 01 | 01/23
© 2023 Honeywell International Inc.

THE
FUTURE
IS
WHAT
WE
MAKE IT

Honeywell